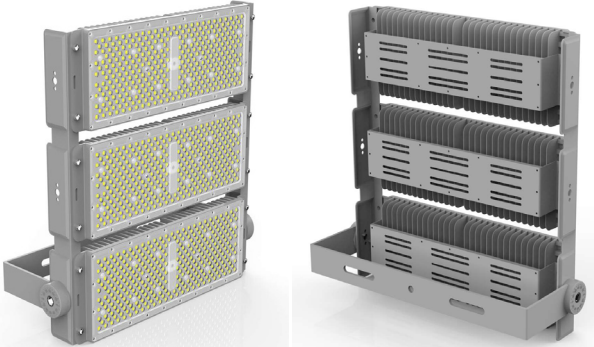
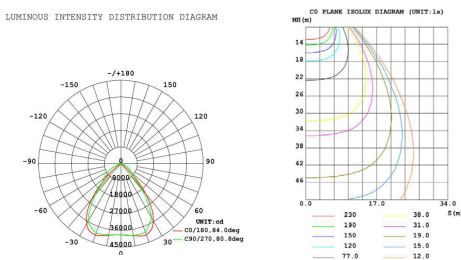

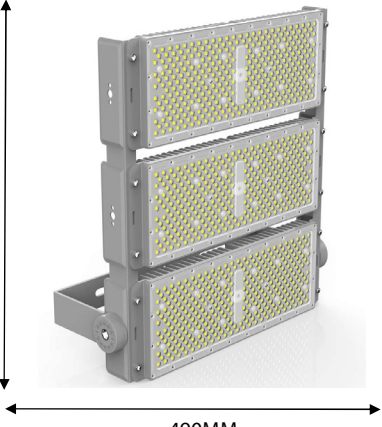


600Watt Module Flood Light Specification

<p>Model No.: LBEFL600SW65-GY</p> 	<p>Item Specifications:</p> <table border="0"> <tr> <td>LED Type:</td> <td><input checked="" type="checkbox"/></td> <td>600 Watt per LED</td> </tr> <tr> <td></td> <td><input type="checkbox"/></td> <td>1200 Watt per LED</td> </tr> <tr> <td>LED Specification:</td> <td><input type="checkbox"/></td> <td>140-150LM</td> </tr> <tr> <td></td> <td><input checked="" type="checkbox"/></td> <td>160LM</td> </tr> <tr> <td>LED Driver:</td> <td><input type="checkbox"/></td> <td>Non-isolated SPD 4KV</td> </tr> <tr> <td></td> <td><input checked="" type="checkbox"/></td> <td>Isolated SPD 6KV IP66</td> </tr> <tr> <td>Total LEDs:</td> <td colspan="2">1008PCS size3030</td> </tr> <tr> <td>Input Voltage:</td> <td colspan="2">AC85-265V</td> </tr> <tr> <td>View Angel:</td> <td><input checked="" type="checkbox"/></td> <td>90 Degree</td> </tr> <tr> <td></td> <td><input type="checkbox"/></td> <td>60 Degree</td> </tr> </table> <table border="0"> <tr> <td>Color temperature(K):</td> <td></td> <td>CCT Range</td> </tr> <tr> <td></td> <td><input checked="" type="checkbox"/></td> <td>Cool White 6500K</td> </tr> <tr> <td></td> <td><input type="checkbox"/></td> <td>Cool White 5700K</td> </tr> </table>	LED Type:	<input checked="" type="checkbox"/>	600 Watt per LED		<input type="checkbox"/>	1200 Watt per LED	LED Specification:	<input type="checkbox"/>	140-150LM		<input checked="" type="checkbox"/>	160LM	LED Driver:	<input type="checkbox"/>	Non-isolated SPD 4KV		<input checked="" type="checkbox"/>	Isolated SPD 6KV IP66	Total LEDs:	1008PCS size3030		Input Voltage:	AC85-265V		View Angel:	<input checked="" type="checkbox"/>	90 Degree		<input type="checkbox"/>	60 Degree	Color temperature(K):		CCT Range		<input checked="" type="checkbox"/>	Cool White 6500K		<input type="checkbox"/>	Cool White 5700K
LED Type:	<input checked="" type="checkbox"/>	600 Watt per LED																																						
	<input type="checkbox"/>	1200 Watt per LED																																						
LED Specification:	<input type="checkbox"/>	140-150LM																																						
	<input checked="" type="checkbox"/>	160LM																																						
LED Driver:	<input type="checkbox"/>	Non-isolated SPD 4KV																																						
	<input checked="" type="checkbox"/>	Isolated SPD 6KV IP66																																						
Total LEDs:	1008PCS size3030																																							
Input Voltage:	AC85-265V																																							
View Angel:	<input checked="" type="checkbox"/>	90 Degree																																						
	<input type="checkbox"/>	60 Degree																																						
Color temperature(K):		CCT Range																																						
	<input checked="" type="checkbox"/>	Cool White 6500K																																						
	<input type="checkbox"/>	Cool White 5700K																																						
<p>Technical Data:</p> <p>Item #: LBEFL600SW65-GY Description: 600W Module Flood light Voltage: AC85-265V Frequency Range: 50Hz-60Hz Power Factor: >0.95 LED Module: 1008PCS size3030 LED Power: 600W Color Temp.: 6000K-6500K Lux Efficiency: 150LM/W LED Initial Flux: 90000LM Beam Angle:90° Color Rendering Index: Ra>80 Working Temp.: -40 - +55 Working Life-Span: 50.000H Connect Wire: Brown/Blue/Yellow Product Size: 180*505*490MM Housing Color: Matt Gray LED Driver: Isolated SPD 6KV</p>	<p>Features:</p> <ul style="list-style-type: none"> *Architectural Style *Intelligent design *Deep cover that ensures low operating temperature *Bright and uniform light emission,high ceilings as well *Energy saving *Easy to Install *5 years warranty 																																							
<p>Case/Cartron Information</p> <p>Master Carton For Street Light :</p>  <table border="1"> <tr> <td>Depth:</td> <td>57.50</td> </tr> <tr> <td>Width:</td> <td>15.50</td> </tr> <tr> <td>Height:</td> <td>50.50</td> </tr> <tr> <td>G.W:</td> <td>13.00 kgs</td> </tr> </table> <p>Qty/Cartron: <u>1</u> Cube: <u>0.05</u></p>	Depth:	57.50	Width:	15.50	Height:	50.50	G.W:	13.00 kgs	<p>Product Size:</p> 																															
Depth:	57.50																																							
Width:	15.50																																							
Height:	50.50																																							
G.W:	13.00 kgs																																							