

SATURN RECESSED ROUND LIGHT


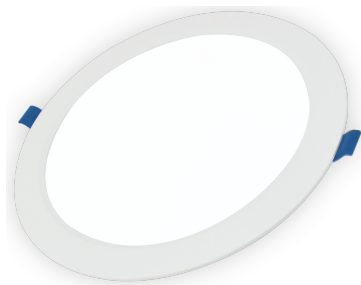


Figure 1

- Narrow edge surface mounted round design
- Built-in driver ensures both a real flatness and a higher safety level
- Innovative design can ease the installation to surface mounted ceiling



220-240 VOLTAGE	85lm/WATTS
0.0%	IP 40
20000 HOURS	ON OFF ≥20000
Hz 50/60 HZ	100°
Ra ≥80	P.F. >0.5
NOT DIMMABLE	<1 se

CCT — 3000K 4000K 6000K

SATURN RECESSED SQUARE LIGHT


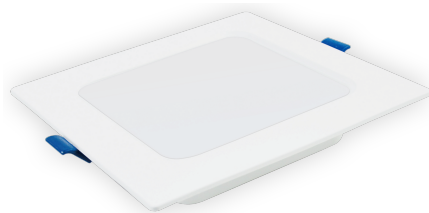


Figure 2

- Narrow edge surface mounted square design
- Built-in driver ensures both a real flatness and a higher safety level
- Innovative design can ease the installation to surface mounted ceiling



220-240 VOLTAGE	85lm/WATTS
0.0%	IP 40
20000 HOURS	ON OFF ≥20000
Hz 50/60 HZ	100°
Ra ≥80	P.F. >0.5
NOT DIMMABLE	<1 se

CCT — 3000K 4000K 6000K

Model	Watts	Voltage	P.F	Lumen	Dimension(mm)	Hole size(mm)	Image Code
LSADL30RR-WH	30W	220-240V	>0.5	80lm/W	289X30	240	Figure 1
LSADL22SR-WH	30W	220-240V	>0.5	80lm/W	218X34	186	Figure 2
LSADL20RR-WH	18W	220-240V	>0.5	80lm/W	218X27.5	186	Figure 1
LSADL15RR-WH	12W	220-240V	>0.5	80lm/W	175X26.5	144	Figure 1
LSADL7RR-WH	7W	220-240V	>0.5	80lm/W	118X25.5	92	Figure 1
LSADL4RR-WH	4W	220-240V	>0.5	80lm/W	98X25.5	74	Figure 1