



HIGHBAY LIGHT

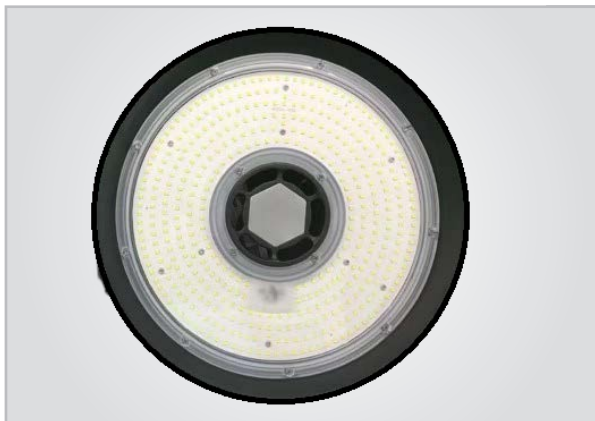

Key Specification

- Die cast aluminum alloy body, surface is treated by electrostatic spraying, anti-corrosion, strong and solid.
- Cooling part with hollow-carved design resulting in good heat dissipation and longer life.
- Clear 120 degree with excellent light transparency.
- Waterproof constant current IC driver with more stable and longer life.


Light Distribution Curve

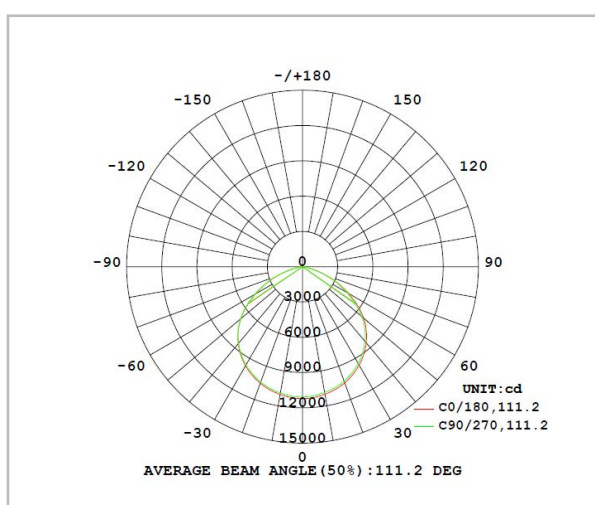

Key Attributes

Application	: Warehouse, Shopping Mall, Factory/Plant, Gym, Indoor Stadium, Workshop, Exhibition Building.
Color Temperature available (CCT)	: 6500K
IP Rating	: IP65 / IK08
Surge Protection	: 6KV
Lamp Body Material	: Die Casted Aluminum
Beam Angle (°)	: 120 Degree
Input Voltage (V)	: AC 100-277V
Frequency Range (Hz)	: 50-60 Hz
Working Temperature (°C)	: -40 to 50°C
Lamp Luminous Efficiency (lm/w)	: 160 lm/w
Working Lifetime (Hour)	: 50000
CRI (Ra)	: >80
Power Wattages available	: 150W/200W
Body Color	: Black

Technical Drawing

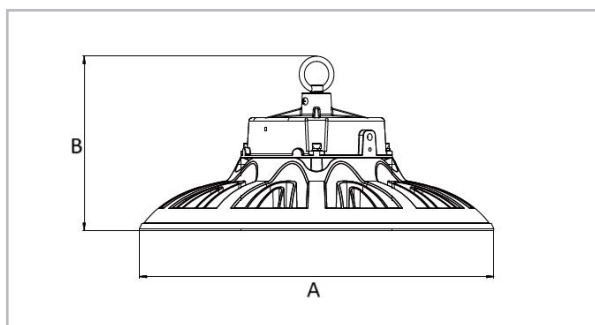

AVAILABLE VARIANTS

Product Code	Wattage	CCT	Lumen Output	Dimensions AxB (mm)
BEHB150H65	150W	6500K	24000 lm	295 X 140 mm
BEHB200H65	200W	6500K	30000 lm	320 x 155 mm