



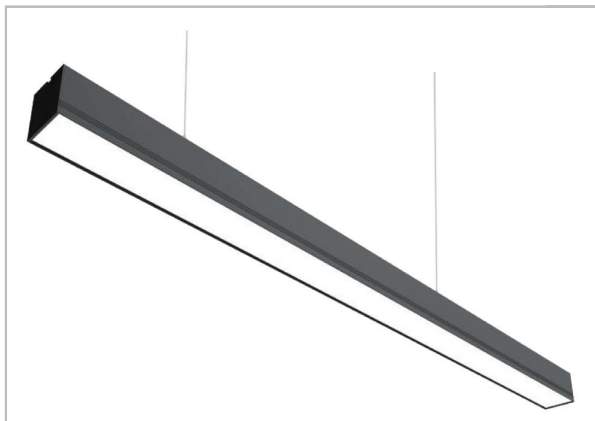

Key Specification

- Stretch aluminum bracket, high strength, excellent heat dissipation performance
- Several surface treatment and color optional, beautiful and generous
- Messenger wire installation, simple operation
- Two mounting methods, pendant and surface
- Back-lit, luminous uniform without dark area
- High luminous efficiency, up to 80 lm/W
- No UV, infrared radiation, no mercury environmental protection.


Light Distribution Curve

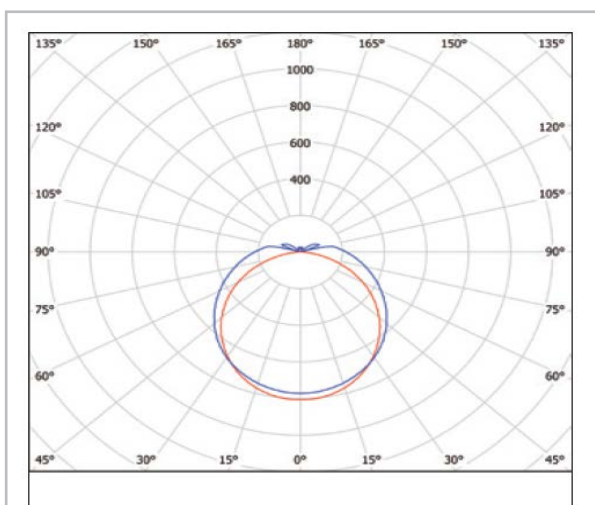

Key Attributes

- | | |
|-----------------------------------|--|
| Application | : Offices, Home interior, Shopping Malls, Shops and other commercial units, Industrial lighting. |
| Color Temperature available (CCT) | : 6500K, 4000K |
| IP Rating | : IP20 |
| Beam Angle (°) | : 120 Degree |
| Input Voltage (V) | : AC 170-240V |
| Frequency Range (Hz) | : 50-60 Hz |
| Working Temperature (°C) | : 0°C to +40°C |
| Lamp Luminous Efficiency (lm/w) | : ~80 lm/w |
| Working Lifetime (Hour) | : 25000 |
| Power Factor | : >0.9 |
| CRI (Ra) | : >80 |
| Power Wattages available | : 60W |
| Body Color | : Black |

Technical Drawing

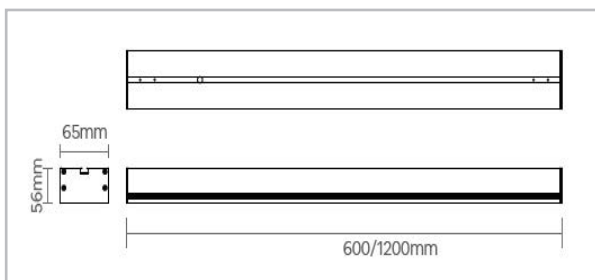

AVAILABLE VARIANTS

Product Code	Wattage	CCT	Lumen Output	Dimensions AxBxC (mm)
EVLP60H65	60W	6500K	4800 lm	1200X65X56mm
EVLP60H40	60W	4000K	4800 lm	1200X65X56mm