



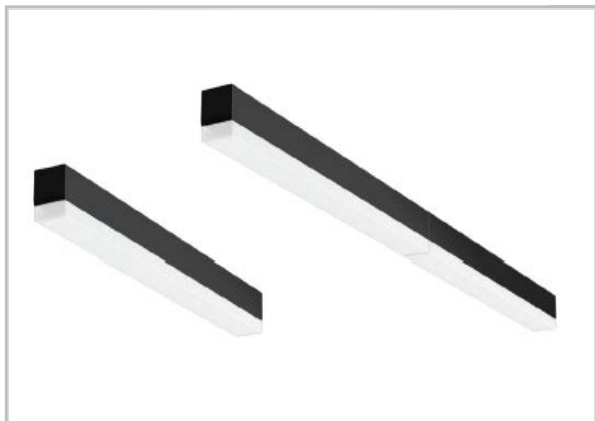

### Key Specification

- Stretch aluminum bracket, high strength, excellent heat dissipation performance
- Several surface treatment and color optional, beautiful and generous
- Messenger wire installation, simple operation
- Two mounting methods, pendant and surface
- Can be continuous stitching(Line/Type L/Type T/Type +), no obvious stitching dark area
- Back-lit, luminous uniform without dark area
- High luminous efficiency, up to 110lm/W
- No UV, infrared radiation, no mercury environmental protection.


### Light Distribution Curve

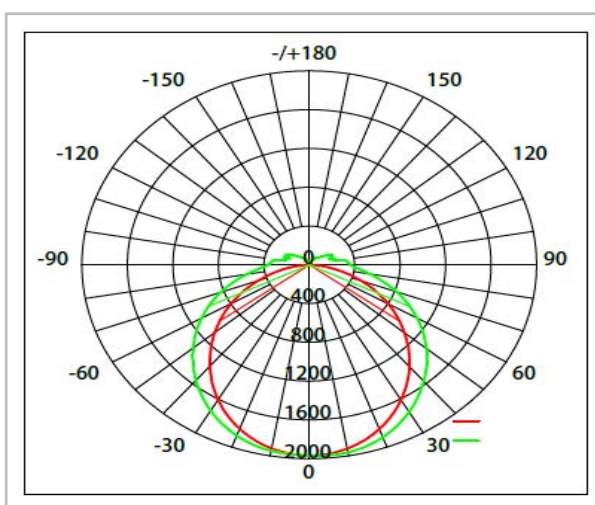


### Key Attributes

|                                   |                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------|
| Application                       | : Offices, Home interior, Shopping Malls, Shops and other commercial units, Industrial lighting. |
| Color Temperature available (CCT) | : 6500K, 4000K, 3000K                                                                            |
| IP Rating                         | : IP20                                                                                           |
| Beam Angle (°)                    | : 120 Degree                                                                                     |
| Input Voltage (V)                 | : AC 170-240V                                                                                    |
| Frequency Range (Hz)              | : 50-60 Hz                                                                                       |
| Working Temperature (°c)          | : 0°c to +40°c                                                                                   |
| Lamp Luminous Efficiency (lm/w)   | : ~110 lm/w                                                                                      |
| Working Lifetime (Hour)           | : 25000                                                                                          |
| Power Factor                      | : >0.9                                                                                           |
| CRI (Ra)                          | : >80                                                                                            |
| Power Wattages available          | : 60W                                                                                            |
| Body Color                        | : Black                                                                                          |

### Technical Drawing

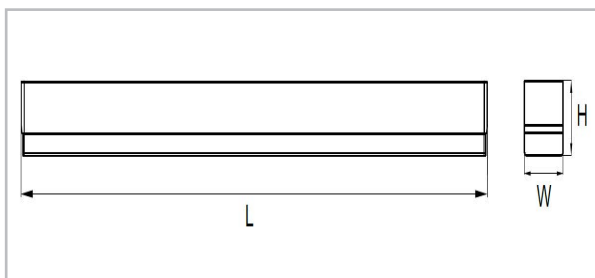

CCT switch optional

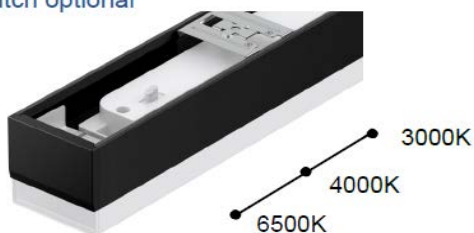

### AVAILABLE VARIANTS

| Product Code | Wattage | CCT               | Lumen Output | Dimensions AxBxC (mm) |
|--------------|---------|-------------------|--------------|-----------------------|
| EXLP60HCT    | 60W     | 6500K,4000K,3000K | 6600 lm      | 1200X50X50mm          |