




Key Specification

- High power recessed ceiling mounted design.
- Silicon steel motor with 100% copper winding.
- The motor has built-in thermo-fuse protection.
- High performance and long life.
- 45° crosscut inlet to improve air exchange rate.
- Made from PP plastic and is light weight, non-toxic, non-corrosive and long lasting.

SPECIFICATIONS							DIMENSIONS (mm)				
Product Code	Voltage (V)	Power (W)	Air-Flow (m³/h)	Noise (DB)	Size (mm)	RPM	A	B	C	D	E
FFCVCS4-WH	220-240 V	25W	200	40	100 mm	1900	245	10	98	100	200
FFCVCS6-WH	220-240 V	28W	250	43	150 mm	1600	270	10	98	100	225

Technical Drawing

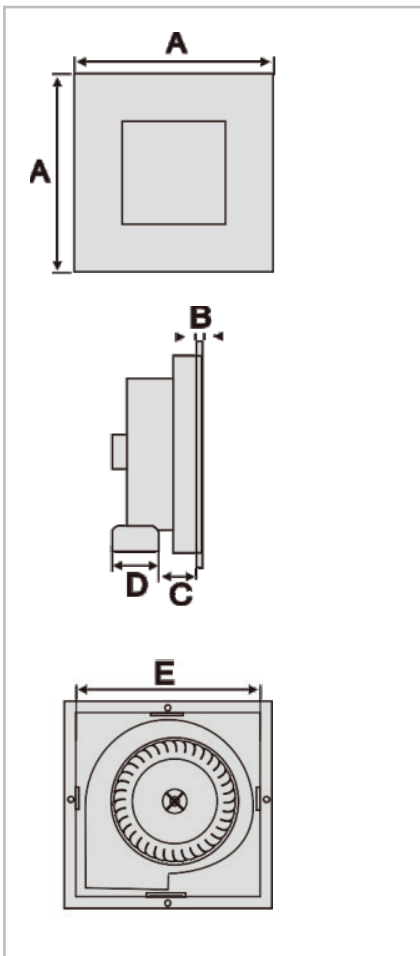

Applications

- Bathrooms, bedrooms, office, lofts, hotels, hostels, kitchen, hospitals, Fitness centers, Super Markets, Schools etc.

Performance Curve

