



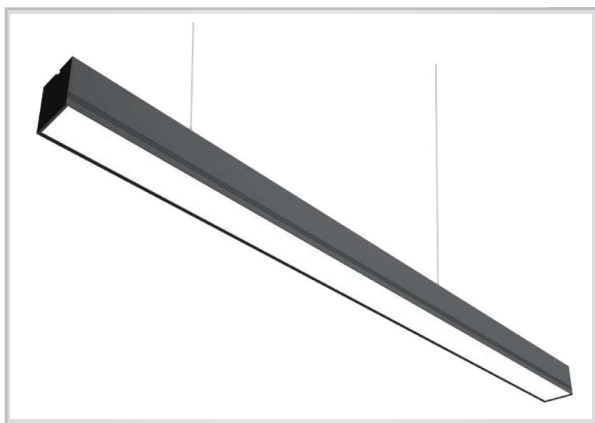

Key Specification

- Stretch aluminum bracket, high strength, excellent heat dissipation performance
- Several surface treatment and color optional, beautiful and generous
- Messenger wire installation, simple operation
- Two mounting methods, pendant and surface
- Back-lit, luminous uniform without dark area
- High luminous efficiency, up to 80lm/W
- No UV, infrared radiation, no mercury environmental protection.


Light Distribution Curve

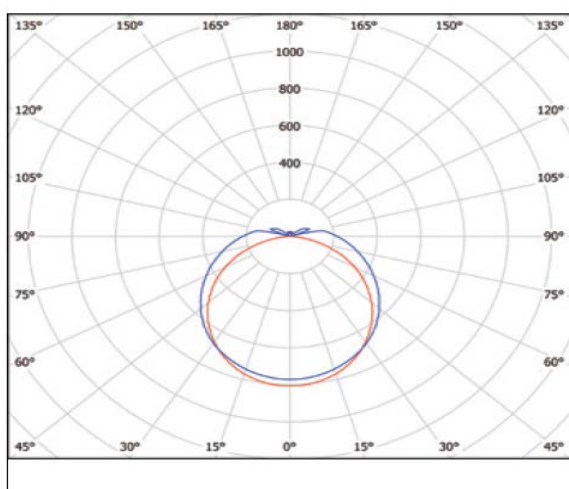

Key Attributes

Application	: Offices, Home interior, Shopping Malls, Shops and other commercial units, Industrial lighting.
Color Temperature available (CCT)	: 6500K, 4000K
IP Rating	: IP20
Beam Angle (°)	: 120 Degree
Input Voltage (V)	: AC 170-240V
Frequency Range (Hz)	: 50-60 Hz
Working Temperature (°c)	: 0°c to +40°c
Lamp Luminous Efficiency (lm/w)	: ~80 lm/w
Working Lifetime (Hour)	: 25000
Power Factor	: >0.9
CRI (Ra)	: >80
Power Wattages available	: 60W
Body Color	: Black

Technical Drawing

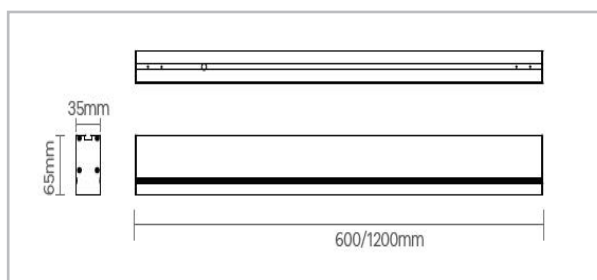

AVAILABLE VARIANTS

Product Code	Wattage	CCT	Lumen Output	Dimensions AxBXC (mm)
NELP60H65	60W	6500K	4800 lm	1200X65X35mm
NELP60H40	60W	4000K	4800 lm	1200X65X35mm